



MIDI

Integration Single Row

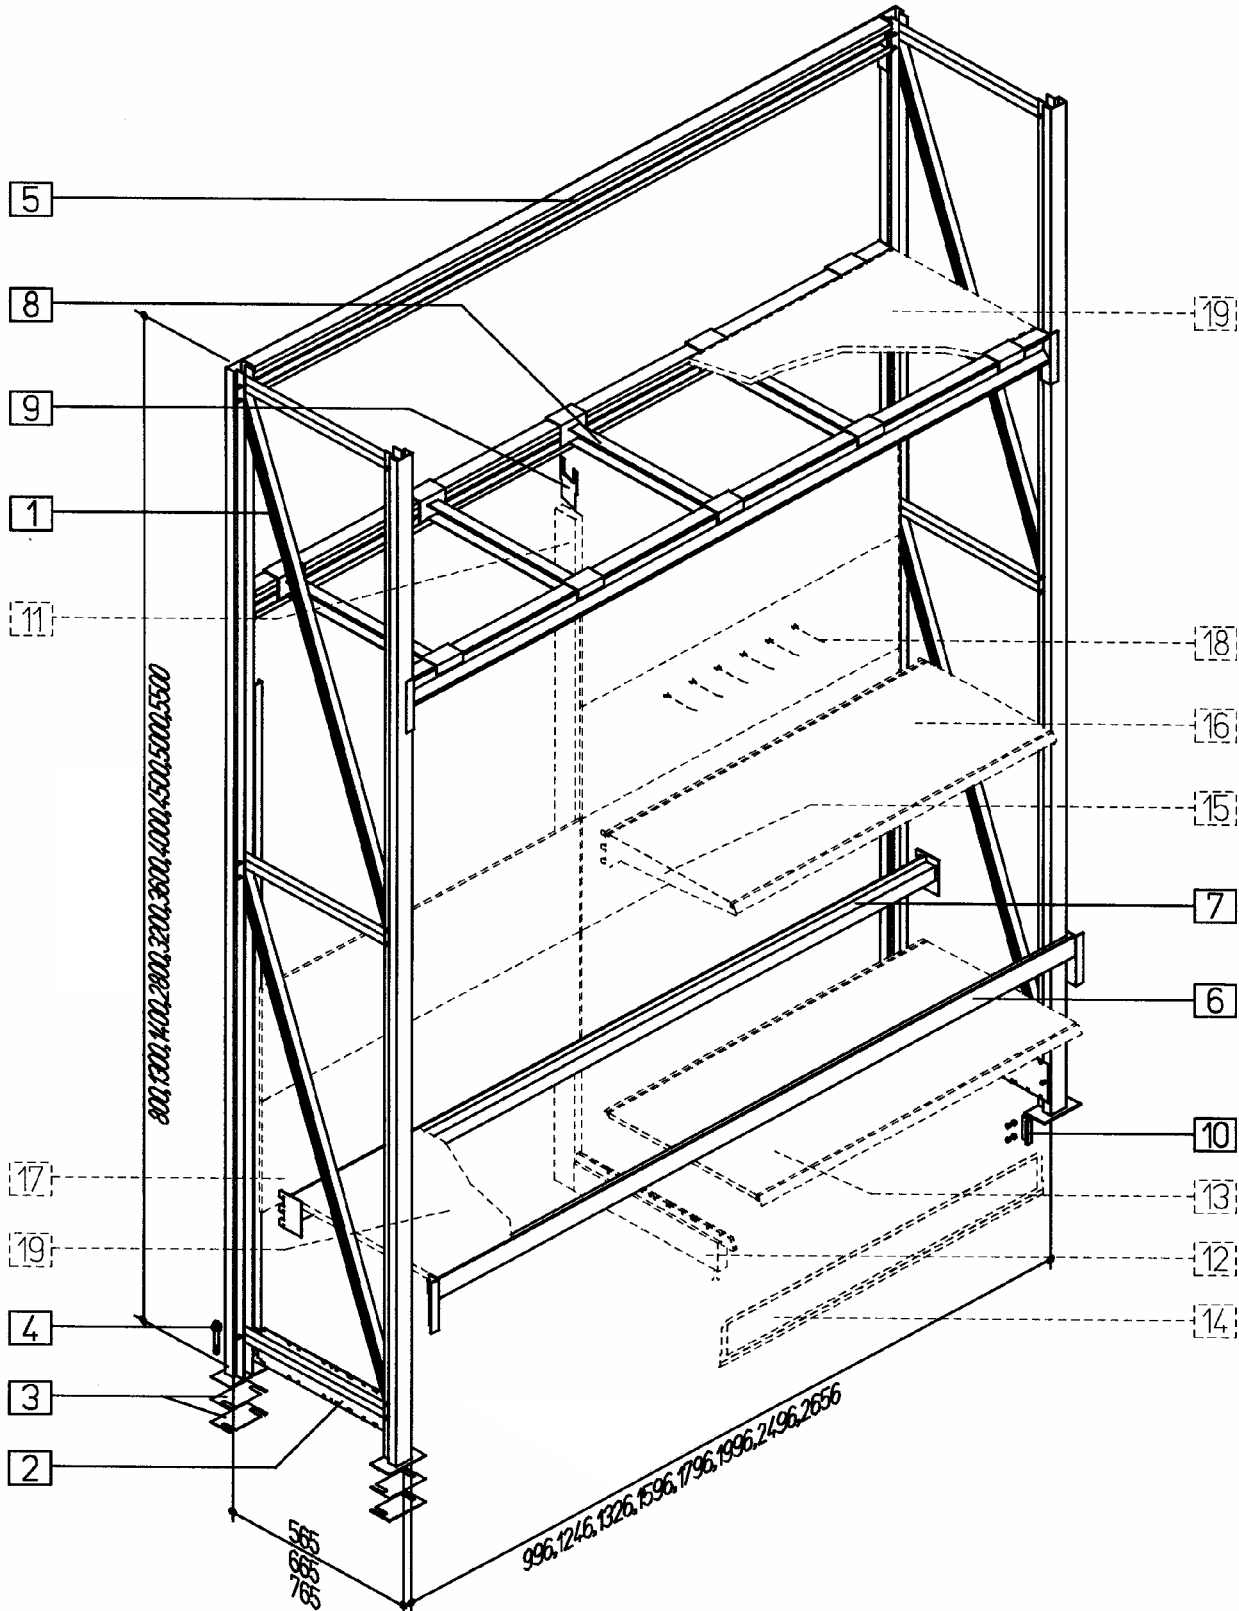



MIDI

Integration Single Row

Delivered as standard

- 1 Racking frame single row with integration height 2400 mm
Frame heights : 800,1300,1400,2800,3200,3600,4000,4500,5000,5500 mm
- 2 Floor strip including screw, turnable
for max. shelf depth 470,570,670 mm
- 3 Levelling plates 130x80 mm
1 mm or 3 mm thick
- 4 Floor anchor
M 10
- 5 Longitudinal beam with normal profile including safety retaining device
Bay clearances : 996,1246,1326,1596,1796,1996,2496,2656 mm
- 6 Longitudinal beam with stepped profile including safety retaining device
Bay clearances : 996,1246,1326,1596,1796,1996,2496,2656 mm
- 7 Longitudinal beam with stepped profile frontal situated incl. safety
device; bay clearances : 996,1246,1326,1596,1796,1996,2496,2656 mm
- 8 Depth support for chipboards 22 mm thick with drilling for adapter
Bay depths : 565,665,765 mm
- 9 Adapter for centre post in single racking
fixed in the longitudinal beam with normal profile
- 10 Angle for accepting the cover strip
including screws

Accessories

- 11 Upright
80x30 mm
- 12 Foot section
H16 or H26
- 13 Shelf
for laying on foot section and floor strip
- 14 Base cover strip
H16 or H26
- 15 Support
for fixing bay bottom
- 16 Bay bottom
for laying on fixing support
- 17 Rear wall
smooth or perforated
- 18 Hooks and accessories
for rear walls
- 19 Chipboard
22 mm thick