




LEOVA® 60/40 S-TOP

Europe's strongest vineyard post

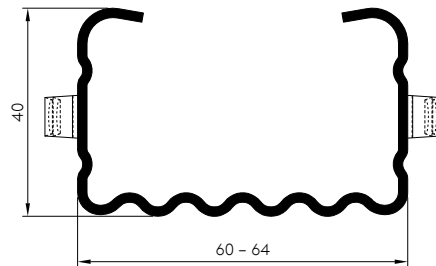

Wire width: 63 mm

- » Maximum load bearing capacity
- » Designed for harvesting machinery
- » For all common types of wire
- » Easy to position
- » voestalpine quality steel
- » Batch-galvanized
- » Option for attaching spring spreader

The leova® 60/40 S-TOP steel post offers a great degree of torsional stiffness as well as lateral and bending stability with a wall thickness of 2 mm.

A setting distance of 6 m is also possible with a foliage height of > 2 m. This saves time and money. With their outstanding properties, they are the strongest vineyard posts in Europe. This has been tested and confirmed by Vienna Technical University.



STRONG AS A LION – SUITED TO YOUR REQUIREMENTS

Batch-galvanized in accordance with the EN ISO 1461 standard

Extremely long service life due to full galvanization with 70 – 80 µm zinc coating.

leova® 60/40 S-TOP
(2.00 mm)

Length/mm	Type.Nr.	kg/item	Claws
2,500*)	F256273102500	5.81	15
2,750	F256373102750	6.39	18
3,000*)	F256473103000	6.97	21
3,250*)	F256573103250	7.55	21
3,500*)	F256673103500	8.13	24

Strip-galvanized in accordance with the EN 10346 standard

275 g of zinc/m²

leova® 60/40 S-TOP
(2.00 mm)

(SPA 60 SEU)

Length/mm	Type.Nr.	kg/item	Claws
2,500*)	F999113102500	5.48	15
2,750	F999113102750	6.02	18
3,000*)	F999113103000	6.57	21
3,250*)	F999113103250	7.12	21
3,500*)	F999113103500	7.67	24

Due to its unique profile, the post can also be set by machine (e.g. by using a hydraulic ramming system) or by hand on stony soils. The post's high lateral stability can be reinforced with additional available anchor plates.

leova® accessories

Spring spreader

Type.Nr.	kg/item
26406	0.31

Straight anchor plates

3824131	0.26
---------	------

Scratch protective cap

1802	
------	--

Impact protection | NEW 60

28462	
-------	--

Anti-hail net 1.2 x 250 m

Type.Nr.	Unit	Requirement/ha
28497	Roll	29 rolls



leova® vineyard posts – Your strong complete system

for all vine training systems, soils and terrains: Posts, end posts, UNI-STOCK vine stakes, anchor, scratch shield, etc.

*) Manufacturing is solely dependent on the order (Period of delivery approx. 6 – 8 weeks)

voestalpine Krems GmbH

T. +43/50304/14-619

leova@voestalpine.com

www.voestalpine.com/leova

voestalpine

ONE STEP AHEAD.