

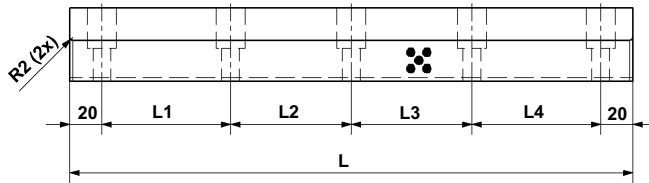




Winkelleisten mit Befestigungsbohrungen

L-Gibs with mounting holes



↑
↓
Gleitrichtung
Slide direction



11.3








WF 750/1A Ident-Nr. Code-No.	L	L1	L2	L3	L4	Form Style	Zyl-Schraube Cheese head screw	
							DIN 912	Stk. / pce.
19500	100	60	-	-	-	H	M8	2
19501	150	55	55	-				3
19502	200	55	50	55				4
19503	100	60	-	-		D	M10	2
19504	150	55	55	-				3
19505	200	55	50	55				4
19506	250	70	70	70		F	M10	4
19507	200	55	50	55				
19508	250	70	70	70				
19509	300	65	65	65		65	F	M10
19510	350	80	75	75	80			

Maße ohne Toleranzangabe DIN ISO 2768 mittel / Measurements without a tolerance specification - DIN ISO 2768 medium

Es ist jeder Zuschnitt bis 1005 mm lieferbar / Any length up to 1005 mm is available

Winkelleisten ohne Befestigungsbohrungen


L-Gibs without mounting holes

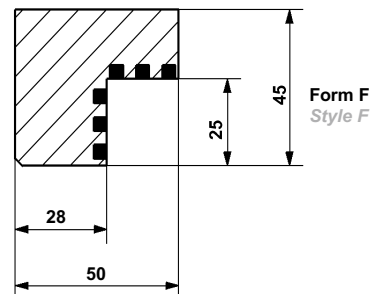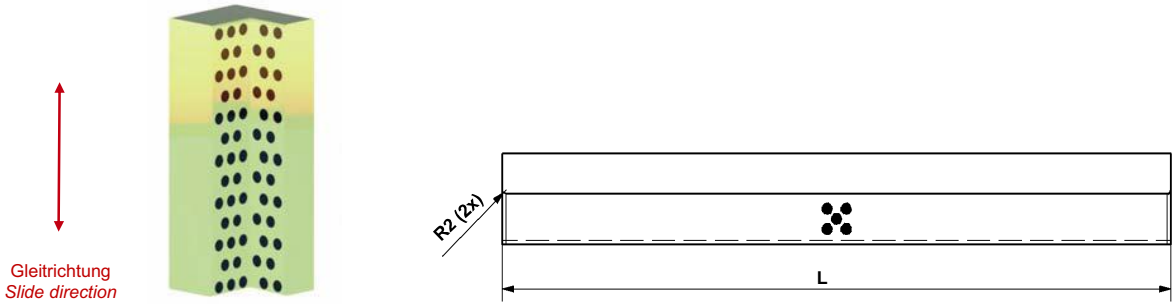

11.3

Winkelleisten ohne Befestigungsbohrungen


L-Gibs without mounting holes




Form G
Style G



Gleitrichtung
Slide direction



Form H
Style H

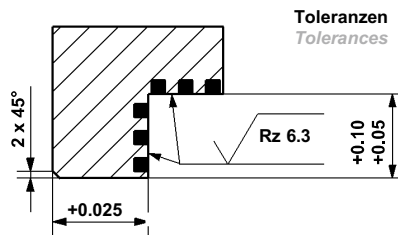

Toleranzen
Tolerances

11.3

WF 750/1A Ident-Nr. Code-No.	Form Style	Länge Length	WF 750/1A Ident-Nr. Code-No.	Länge Length	WF 750/1A Ident-Nr. Code-No.	Länge Length
19470	A	500	19480	605	-	-
19471	B		19481		19491	1005
19472	C		19482		19492	
19473	D		19483		19493	
19474	E		19484		19494	
19475	F		19485		19495	
19476	G		19486		19496	
19477	H		19487		19497	

Maße ohne Toleranzangabe DIN ISO 2768 mittel / Measurements without a tolerance specification - DIN ISO 2768 medium

Es ist jeder Zuschnitt bis 1005 mm lieferbar / Any length up to 1005 mm is available