

HIGH SPEED STEELS

Application Segments

Cutting Tools

Automotive

Available Product Variants

Long Products*

Plates

* Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

Product Description

BÖHLER S600 – "The high-speed steel"

Ideal for mills, twist drills, and taps, broaches, cold-work tools. BÖHLER S600 is the most commonly used high-speed steel and is the starting material for our customers who deal with high-speed steel.

Process Melting

Airmelted or Airmelted + ESR (ISORAPID)

Properties

- > Toughness & Ductility : high
- > Wear Resistance : high
- > Compressive strength : high
- > Edge Stability : high
- > Grindability : high
- > Hot Hardness (red hardness) : high

Applications

- | | | |
|--|-------------------------------|-------------------------------------|
| > Broaches and Reamers | > Cold Forming / Coining | > Fine Blanking, Stamping, Blanking |
| > Gear Cutting, Shaving and Shaping Tools | > Injection Components | > Powder Pressing |
| > Rolling | > Industrial Knives | > Special Cutting Tools |
| > Standard Parts (Moulds, Plates, Pins, Punches) | > Twist Drills and Taps | > Wear parts |
| > Thread rolling | > Blades for Sawing Machines | > Machine knife (for producers) |
| > Wear Applications | > Mineral Processing | > Drilling |
| > Clamping | > Other Industrial Components | > Turbo Chargers |
| > Roll Forming | > Packaging industry | |

Technical data

Material designation		Standards	
1.3343	SEL	4957	EN ISO
HS6-5-2C	EN		

Chemical composition (wt. %)

C	Cr	Mo	V	W
0.9	4.1	5	1.8	6.2

Material characteristics

	Compressive strength	Grindability	Red hardness	Toughness	Wear resistance	Edge Stability
BÖHLER S600	★★★	★★★	★★★	★★	★★	★★★
BÖHLER S200	★★★	★★	★★★	★★	★★★	★★
BÖHLER S401	★★	★★★	★★	★★★	★★	★★★
BÖHLER S404	★★	★★★	★★	★★★	★★	★★
BÖHLER S405	★★★	★★★	★★	★★★	★★	★★
BÖHLER S430	★★	★★★	★★	★★★	★★	★★
BÖHLER S500	★★★★	★★★	★★★★	★★	★★★	★★★
BÖHLER S607	★★★	★★★	★★★	★★	★★★	★★★
BÖHLER S630	★★★	★★★	★★★	★★	★★	★★★
BÖHLER S705	★★★	★★★	★★★★	★★	★★	★★★★
BÖHLER S730	★★★	★★★	★★★★	★★	★★	★★★★

Delivery condition

Annealed

Hardness (HB)	max. 280
Ultimate tensile strength (UTS) (MPa)	max. 950
Tensile Strength (MPa)	max. 950

Hardened and Tempered

Hardness (HRC)	min. 62 bars hardened and tempered (BHT)
----------------	--

Heat treatment

Annealing

Temperature	770 to 840 °C	Controlled slow cooling in furnace (10 - 20°C / h (50 - 68°F / h)) to approx. 600°C (1110°F), air cooling.
-------------	---------------	--


Stress relieving

Temperature	600 to 650 °C	Slow cooling furnace. To relieve stresses set up by extensive machining or in tools of intricate shape. After through heating, hold in neutral atmosphere for 1 to 2 hours.
-------------	---------------	---

Hardening and Tempering

Temperature	1,100 to 1,210 °C	Salt bath, vacuum Preheating: 1st stage ~ 500 °C, 2nd stage ~ 850 °C, 3rd stage ~1050 °C Austenitising: 1100 - 1210 °C, holding time after complete heating 80 seconds, maximum 150 seconds, to avoid material damage due to overheating. Quenching: oil, warm bath (500 - 550 °C), gas
Temperature	550 to 570 °C	Slow heating to tempering temperature immediately after austenitising. Dwell time in the furnace at least 2 hours Slow cooling to room temperature 3 tempering cycles recommended Hardness see tempering chart


Continuous cooling CCT curves

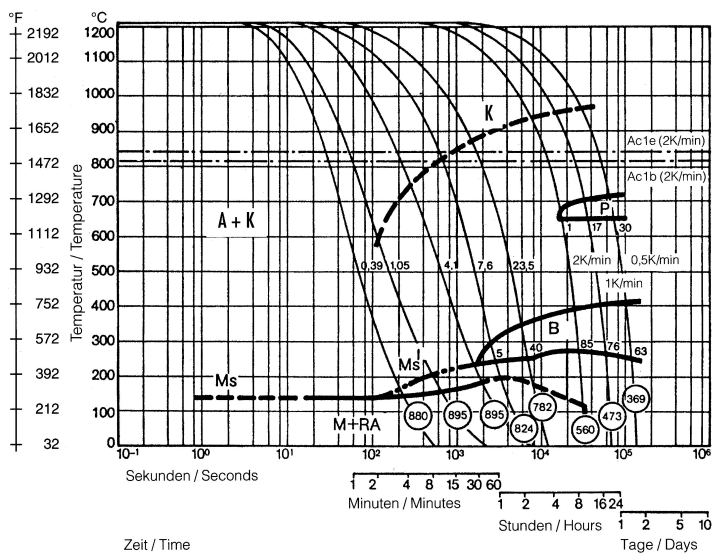

Austenitising temperature: 1210°C (2210°F)
Holding time: 180 seconds

A....Austenite
B....Bainite
K....Carbide
P....Pearlite
M....Martensite
RA...Retained Austenite

Quantitative phase diagram

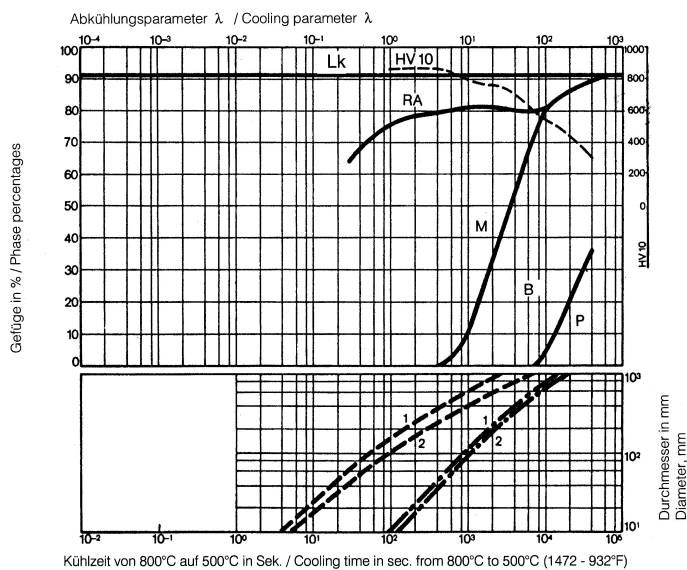


A....Austenite
B....Bainite
K....Carbide
P....Pearlite
M....Martensite
RA...Retained Austenite

1....Edge or Face
2....Core
3....Jominy test: distance from quenched end

-- oilcooling
- - - aircooling

Tempering Chart

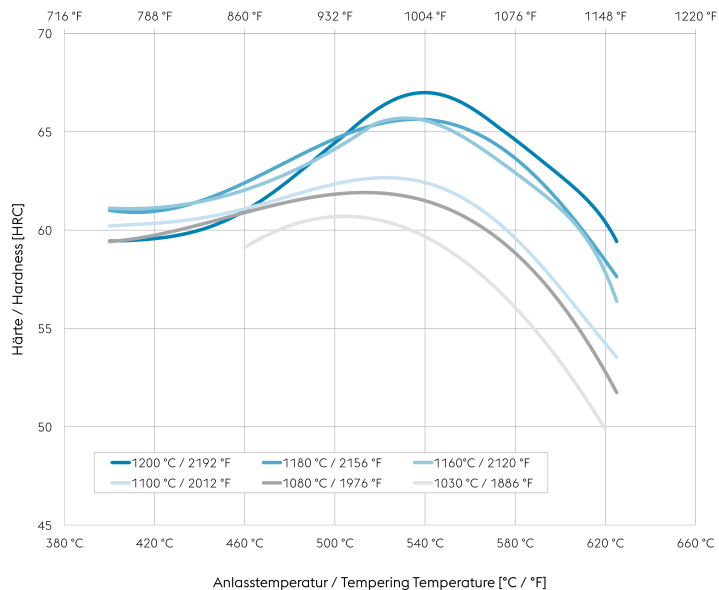

Vacuum

Holding time 3 x 2 hours
Specimen size: square 25 mm

Physical Properties

Temperature (°C)	20
Density (kg/dm ³)	8.07
Thermal conductivity (W/(m.K))	21.8
Specific heat (kJ/kg K)	0.433
Spec. electrical resistance (Ohm.mm ² /m)	0.47
Modulus of elasticity (10 ³ N/mm ²)	219

Thermal Expansions between 20°C | 68°F and ...

Temperature (°C)	100	200	300	400	500	600	700
Thermal expansion (10 ⁻⁶ m/(m.K))	11.5	11.7	12.2	12.4	12.7	13	12.9

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25

8605 Kapfenberg, AT

T. +43/50304/20-0

E. info@bohler-edelstahl.at

<https://www.voestalpine.com/bohler-edelstahl/de/>

voestalpine

ONE STEP AHEAD.