

HIGH SPEED STEELS

Application Segments

Cutting Tools

Available Product Variants

Long Products*

Plates

* Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

Product Description

BÖHLER S200 – "The old man"

This traditional tungsten high-speed steel shows its class as it always has in a tough working environment. High hot hardness and good wear resistance are characteristic of this class.

Process Melting

Airmelted

Properties

- > Toughness & Ductility : good
- > Wear Resistance : high
- > Compressive strength : good
- > Edge Stability : good
- > Grindability : good
- > Hot Hardness (red hardness) : high

Applications

- > Special Cutting Tools
- > Machine knife (for producers)
- > End Mills
- > Twist Drills and Taps
- > Gear Cutting, Shaving and Shaping Tools

Technical data

Material designation		Standards	
1.3355	SEL	4957	EN ISO
HS18-0-1	EN	A600	ASTM
T12001	UNS		
T1	AISI		

Chemical composition (wt. %)

C	Si	Mn	Cr	V	W
0.75	0.25	0.30	4.10	1.10	18.00

Material characteristics

	Compressive strength	Grindability	Red hardness	Toughness	Wear resistance	Edge Stability
BÖHLER S200	★★★	★★	★★★	★★	★★★	★★
BÖHLER S600	★★★	★★★	★★★	★★	★★	★★★
BÖHLER S401	★★	★★★	★★	★★★	★★	★★★
BÖHLER S404	★★	★★★	★★	★★★	★★	★★
BÖHLER S405	★★★	★★★	★★	★★★	★★	★★
BÖHLER S500	★★★★	★★★	★★★★	★★	★★★	★★★
BÖHLER S607	★★★	★★★	★★★	★★	★★★	★★★
BÖHLER S630	★★★	★★★	★★★	★★	★★	★★★
BÖHLER S705	★★★	★★★	★★★★	★★	★★	★★★★
BÖHLER S730	★★★	★★★	★★★★	★★	★★	★★★★


Delivery condition

Annealed	
Hardness (HB)	max. 280
Tensile Strength (N/mm ²)	max. 980

Heat treatment

Annealing		
Temperature	770 to 840 °C	Controlled slow cooling in furnace (10 to 20°C/h / (50 to 68°F/h) to approx. 600°C (1112°F), air cooling.
Stress relieving		
Temperature	600 to 650 °C	Slow cooling in furnace. To relieve stresses set up by extensive machining or in tools of intricate shape. After through heating, hold in neutral atmosphere for 1 to 2 hours.
Hardening and Tempering		
Temperature	1,250 to 1,290 °C	Salt bath, vacuum Preheating: 1st stage ~ 500 °C (930 °F), 2nd stage ~ 850 °C (1560 °F), 3rd stage ~1050 °C (1920 °F) Austenitising: 1250 - 1290 °C (2280 - 2350 °F), holding time after complete heating 80 seconds, maximum 150 seconds, to avoid material damage due to overheating. Quenching: oil, warm bath (500 - 550 °C (930 - 1020 °F)), vacuum (nitrogen)
Temperature	550 to 580 °C	Slow heating to tempering temperature immediately after austenitising. Dwell time in the furnace 1 hour per 20 mm material thickness (at least 1 hour) Slow cooling to room temperature 3 tempering cycles recommended Hardness see tempering chart


Continuous cooling CCT curves

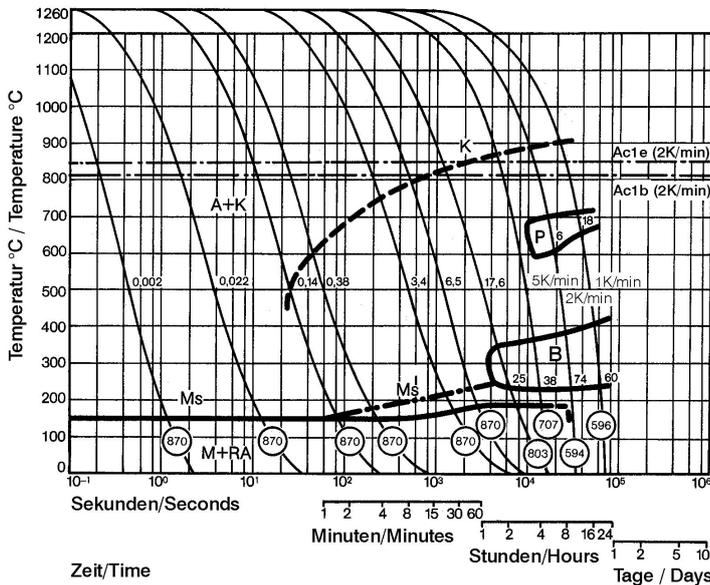

Austenitising temperature: 1260°C (2300°F)
Holding time: 150 seconds

○...Vickers hardness
6...18 phase percentages
0.002...17.6 cooling parameter, i.e. duration of cooling from 800-500°C (1472-932°F) in $s \times 10^{-2}$
5 K/min ...1 K/min cooling rate in K/min in the 800 - 500°C (1472 - 932°F) range
Ms-Ms'...range of grain boundary martensite formation

Quantitative phase diagram

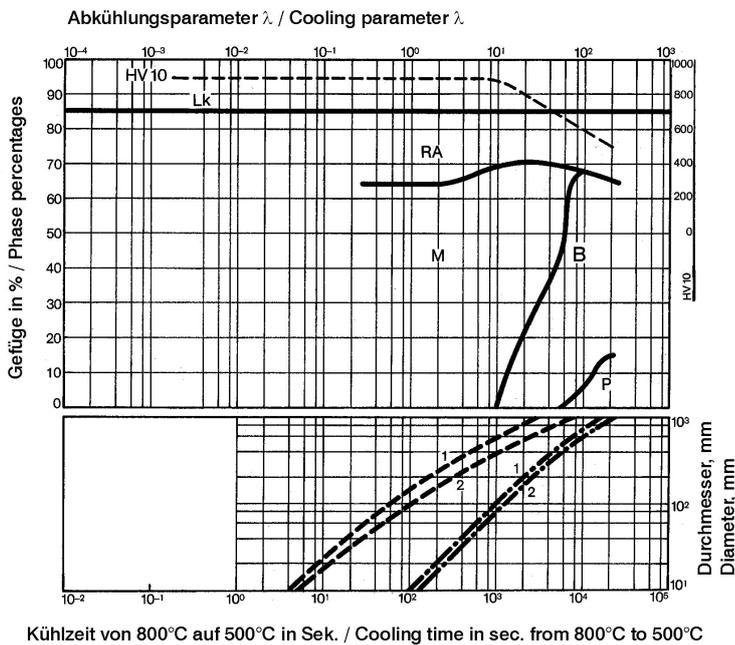


- A . . Austenite
- B . . Bainite
- K . . Carbide
- M . . Martensite
- P . . Pearlite
- Lk . . Ledeburite carbide
- RA . Retained austenite

- - - Oil cooling
- ● - Air cooling
- 1 . . Edge or face
- 2 . . Core

Kühlzeit von 800°C auf 500°C in Sek. / Cooling time in sec. from 800°C to 500°C

Tempering Chart

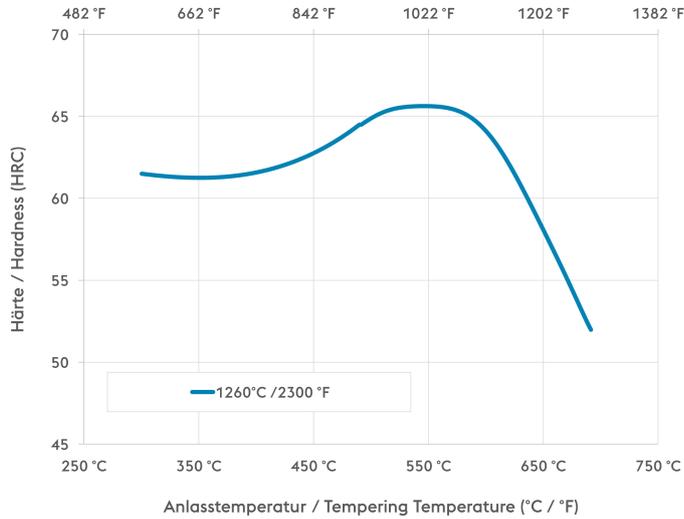

Hardening temperature: 1260°C (2300°F)
 Specimen size: square 20 mm

Physical Properties

Temperature (°C)	20
Density (kg/dm ³)	8.7
Thermal conductivity (W/(m.K))	19
Specific heat (kJ/kg K)	0.46
Spec. electrical resistance (Ohm.mm ² /m)	0.5
Modulus of elasticity (10 ⁹ N/mm ²)	217

Thermal Expansions between 20°C | 68°F and ...

Temperature (°C)	100	200	300	400	500	600	700
Thermal expansion (10 ⁻⁶ m/(m.K))	10	10.5	10.8	11.2	11.3	11.4	11.6

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25
 8605 Kapfenberg, AT
 T. +43/50304/20-0
 E. info@bohler-edelstahl.at
<https://www.voestalpine.com/bohler-edelstahl/de/>