

COLD WORK TOOL STEELS

Application Segments

Cold Work

Available Product Variants

Long Products*

Plates

* Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

Product Description

BÖHLER K305 belongs to the group of 5% chromium steels and corresponds to the material 1.2363 (X100CrMoV5, A2). Compared to conventional tool steels with 1% carbon and low chromium content, BÖHLER K305 has significantly better through hardenability and wear resistance. This class of 5% chromium steels is used in situations where grades like 1.2842 are no longer sufficient in terms of wear resistance and through hardenability but materials like 1.2379 are not yet required. BÖHLER K305 is used for punching and cutting tools, die plates and inserts, thread cutting tools and machine knives in the wood, paper and recycling industries.

Process Melting

Airmelted

Properties

- > Wear Resistance : very high
- > Compressive strength : very high
- > Dimensional stability : good

Applications

- > Machine knife (for producers)
- > Powder Pressing
- > Clamping
- > Wear Applications
- > Roll Forming
- > Rolling
- > Tool Holders
- > Drilling
- > Components for the recycling industry
- > Packaging industry
- > Fine Blanking, Stamping, Blanking
- > Industrial Knives
- > Mineral Processing
- > Camshafts
- > Cold Forming / Coining

Technical data

Material designation		Standards	
1.2363	SEL	4957	EN ISO
X100CrMoV5	EN		
~X100CrMoV5-1			
~T30102	UNS		
A2	AISI		
SKD12	JIS		

Chemical composition (wt. %)

C	Si	Mn	Cr	Mo	V
1.00	0.30	0.55	5.20	1.10	0.25

Material characteristics

	Compressive strength	Dimensional stability during heat treatment	Toughness	Wear resistance abrasive	Wear resistance adhesive
BÖHLER K305	★★★★★	★★★	★★	★★★★★	
BÖHLER K306	★★★★★	★★★	★★★★★	★★★	
BÖHLER K313	★★★★★	★★★	★★★★	★★★	
BÖHLER K320	★★★★	★★★	★★★★	★★★	
BÖHLER K329	★★★★	★★★	★★★★★	★★★★★	
BÖHLER K600	★	★★★	★★★★★	★	
BÖHLER K601	★	★★★	★★★★★	★★	
BÖHLER K605	★★	★★★	★★★★★	★	


Delivery condition

Annealed	
Hardness (HB)	max. 240


Heat treatment

Annealing		
Temperature	800 to 850 °C	Slow controlled cooling in furnace at a rate of 10 to 20 °C/hr (18 to 36 °F/hr) down to approximately 600 °C (1112 °F) Further cooling in air.
Stress relieving		
Temperature	650 °C	After through heating, hold in neutral atmosphere for 1-2 hours. Slow cooling in furnace Intended to relieve stresses caused by extensive machining or in complex shapes.
Hardening and Tempering		
Temperature	950 to 980 °C	Quenching: Oil, salt bath (220 to 250 °C or 500 to 550 °C 428 to 482 °F or 932 to 1022 °F), gas, air. Holding time after temperature equalization: 15 to 30 minutes. After hardening, tempering to the desired working hardness according to the tempering chart.


Tempering chart

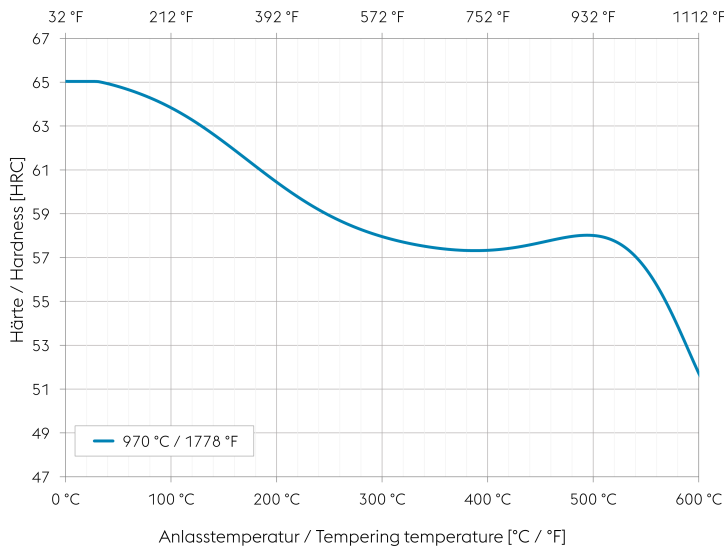

Continuous cooling CCT curves

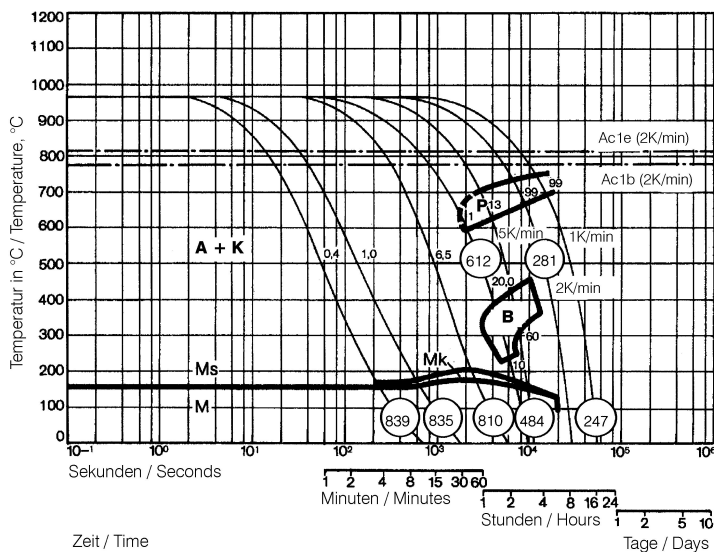

Quantitative phase diagram

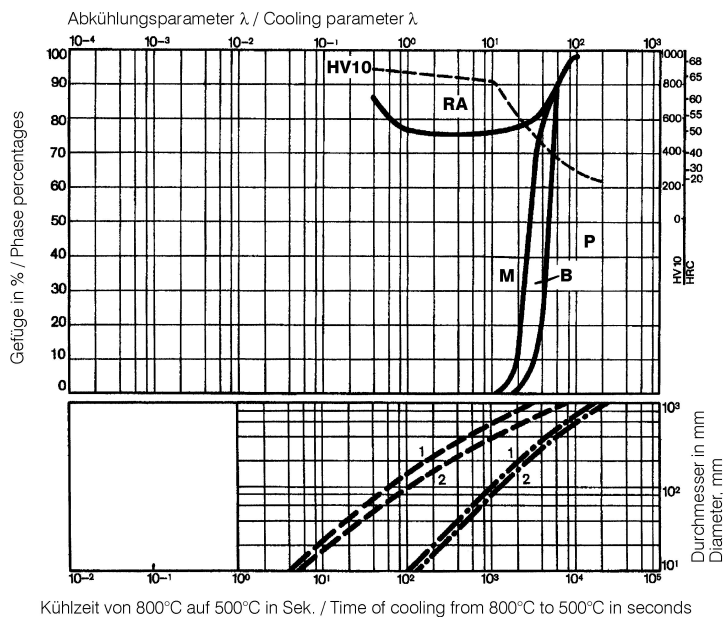


HV10... Vickers Hardness
RA... Residual austenite
M... Martensite
B... Bainite
P... Pearlite

- - - Oil cooling
- · - Air cooling

1... Edge or face
2... Core


Isothermal TTT curves

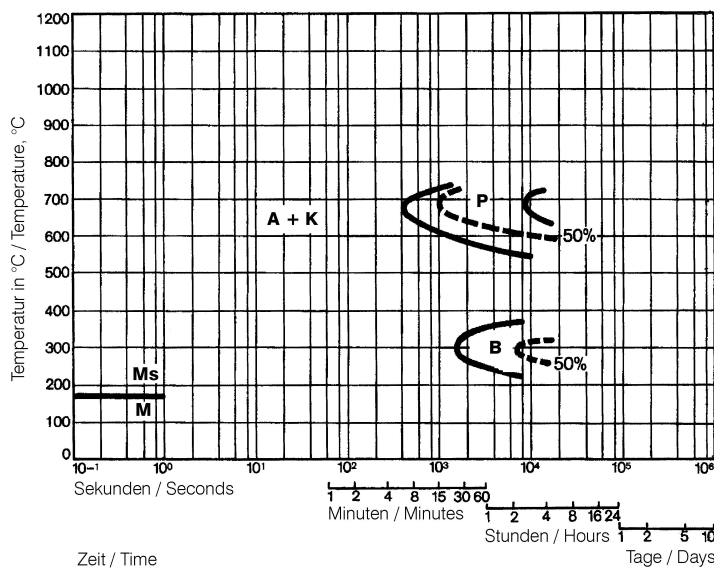


Austenitising temperature: 960 °C (1760 °F)
Holding time: 15 minutes

A... Austenite
K... Carbide
P... Pearlite
B... Bainite
M... Martensite
M_s... Martensite starting temperature

Influence of work diameter on core hardness and hardness penetration

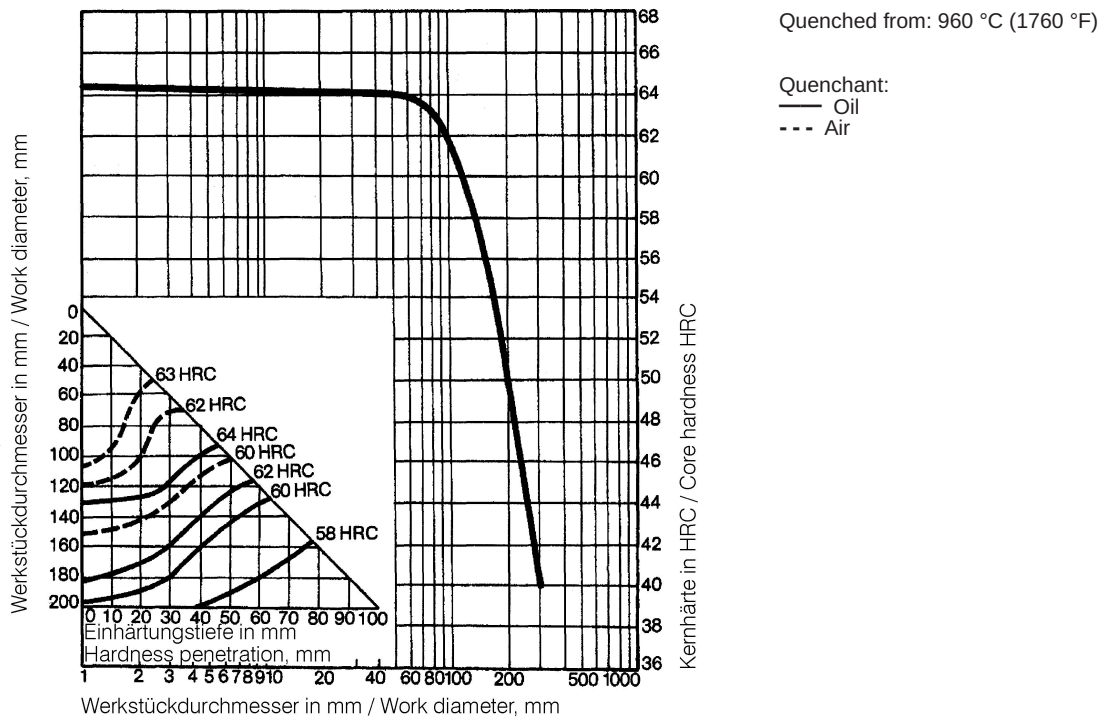

Heat treatment sequence

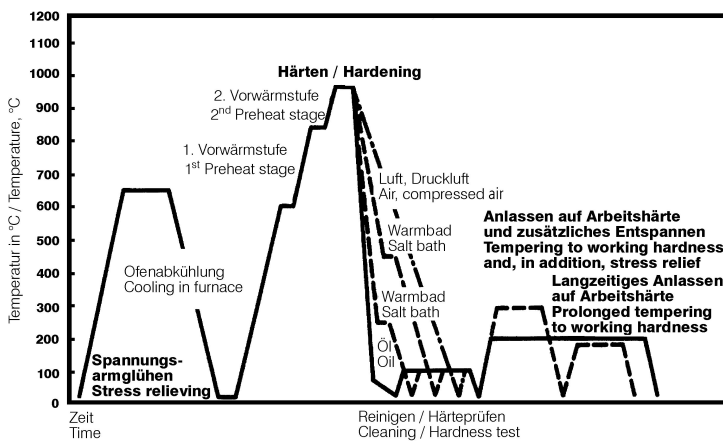

Physical Properties

Temperature (°C)	20
Density (kg/dm ³)	7.7
Thermal conductivity (W/(m.K))	26
Specific heat (kJ/kg K)	0.46
Spec. electrical resistance (Ohm.mm ² /m)	0.52
Modulus of elasticity (10 ³ N/mm ²)	190

Thermal Expansions between 20°C | 68°F and ...

Temperature (°C)	100	200	300	400	500
Thermal expansion (10 ⁻⁶ m/(m.K))	12	12.1	11.9	11.6	11.7

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25

8605 Kapfenberg, AT

T. +43/50304/20-0

E. info@bohler-edelstahl.at<https://www.voestalpine.com/bohler-edelstahl/de/>**voestalpine**

ONE STEP AHEAD.