

COLD WORK TOOL STEELS

Application Segments

Cold Work

Available Product Variants

Long Products*

Plates

* Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

Product Description

BÖHLER K306 belongs to the group of 5% chromium steels and is approximately equivalent to the material 1.2345 (~X50CrMoV5 1). Its alloy composition, however, has a higher vanadium content, making BÖHLER K306 more wear resistant than the conventional hot work tool steel 1.2345. BÖHLER K306 is used in hot work applications and for stamping and cutting tools. With its high toughness and resulting high fracture safety, this material is also very suitable for machine knives in the wood, paper and recycling industries.

Process Melting

Airmelted

Properties

- > Toughness & Ductility : high
- > Wear Resistance : good
- > Compressive strength : high
- > Dimensional stability : good

Applications

- > Fine Blanking, Stamping, Blanking
- > Machine knife (for producers)
- > Industrial Knives
- > Packaging industry
- > Cold Forming / Coining

Technical data

Material designation	
~1.2345	SEL
~X50CrMoV5-1	EN

Chemical composition (wt. %)

C	Si	Mn	Cr	Mo	V
0.51	0.95	0.30	5.00	1.40	1.40

Material characteristics

	Compressive strength	Dimensional stability during heat treatment	Toughness	Wear resistance abrasive	Wear resistance adhesive
BÖHLER K306	★★★★	★★★	★★★★	★★★	
BÖHLER K305	★★★★★	★★★	★★	★★★★★	
BÖHLER K313	★★★★	★★★	★★★	★★★	
BÖHLER K320	★★★	★★★	★★★	★★★	
BÖHLER K329	★★★	★★★	★★★★	★★★★	
BÖHLER K600	★	★★★	★★★★★	★	
BÖHLER K601	★	★★★	★★★★★	★★	
BÖHLER K605	★★	★★★	★★★★★	★	


Delivery condition

Annealed		
Hardness (HB)		max. 240


Heat treatment

Annealing		
Temperature	750 to 800 °C	Slow controlled cooling in furnace at a rate of 10 to 20 °C/hr (18 to 36 °F/hr) down to approximately 600 °C (1112 °F) Further cooling in air.
Stress relieving		
Temperature	650 °C	After through heating, hold in neutral atmosphere for 1-2 hours. Slow cooling in furnace Intended to relieve stresses caused by extensive machining or in complex shapes.
Hardening and Tempering		
Temperature	1,050 to 1,100 °C	Quenching: Oil, salt bath (500 to 550 °C 932 to 1022 °F), air. Holding time after temperature equalization: 15 to 30 minutes. After hardening, tempering to the desired working hardness according to the tempering chart.


Tempering chart

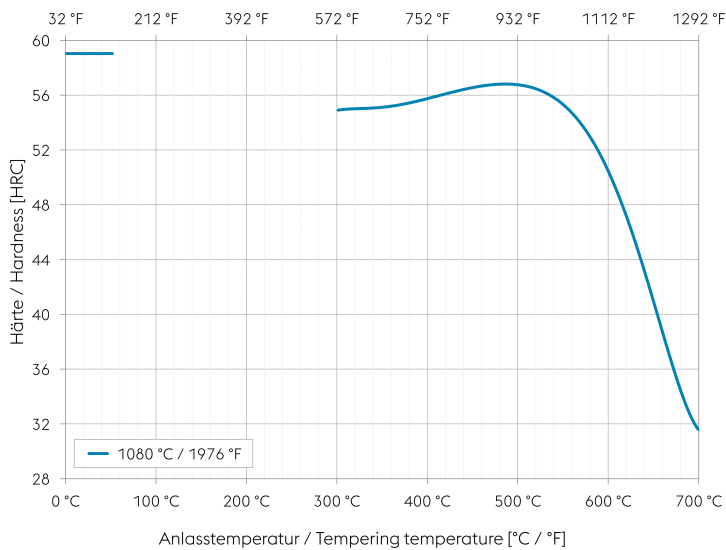

Continuous cooling CCT curves

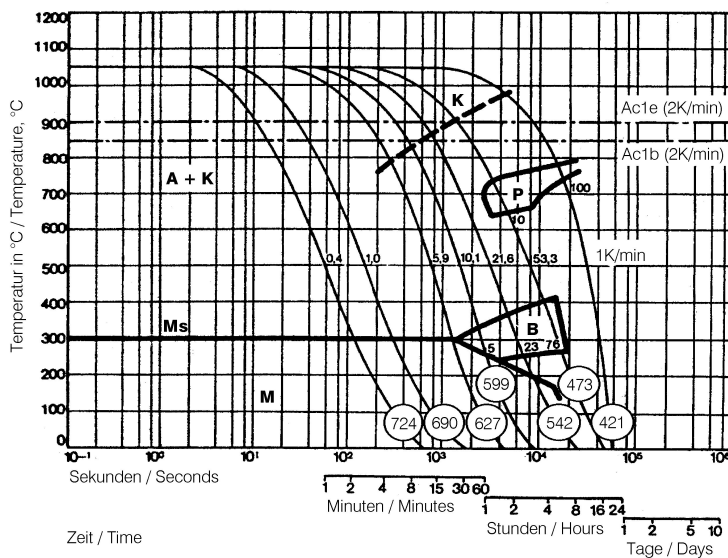

Quantitative phase diagram

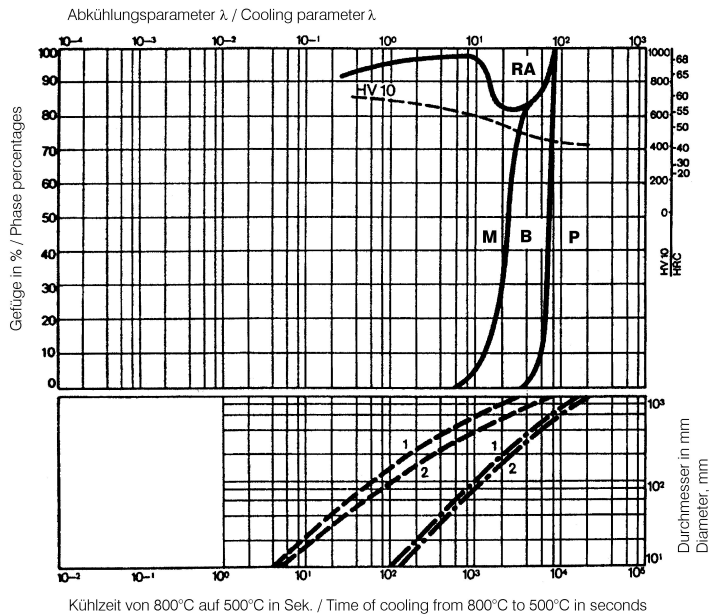


HV10... Vickers Hardness
 RA... Residual austenite
 M... Martensite
 B... Bainite
 P... Pearlite

--- Oil cooling
 - · - Air cooling

1... Edge or face
 2... Core


Hot strength chart

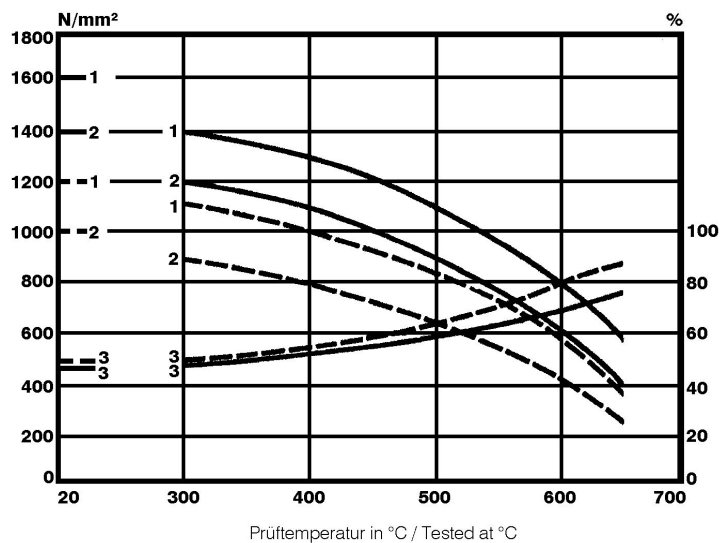

— heat treated 1600 N/mm²
 --- heat treated 1200 N/mm²

1... Tensile strength N/mm²
 2... 0.2 % offset yield strength N/mm²
 3... Reduction of area %

Heat treatment sequence

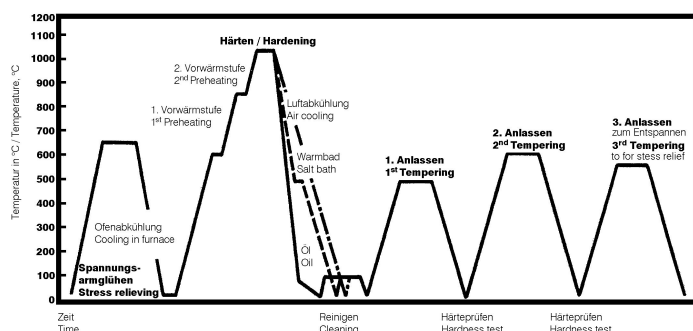

Physical Properties

Temperature (°C)	20
Density (kg/dm ³)	7.8
Thermal conductivity (W/(m.K))	25
Specific heat (kJ/kg K)	0.46
Spec. electrical resistance (Ohm.mm ² /m)	0.52
Modulus of elasticity (10 ³ N/mm ²)	215

Thermal Expansions between 20°C | 68°F and ...

Temperature (°C)	100	200	300	400	500
Thermal expansion (10 ⁻⁶ m/(m.K))	11.5	12	12.2	12.5	12.9

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25

8605 Kapfenberg, AT

T. +43/50304/20-0

E. info@bohler-edelstahl.at

<https://www.voestalpine.com/bohler-edelstahl/de/>

voestalpine

ONE STEP AHEAD.