

ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2


Owner of the Declaration	voestalpine AG
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-VOE-20230216-IBC1-EN
Issue date	21.08.2023
Valid to	20.08.2028

Electrogalvanized steel strip voestalpine Stahl GmbH

www.ibu-epd.com | <https://epd-online.com>



ECO PLATFORM
EPD
VERIFIED

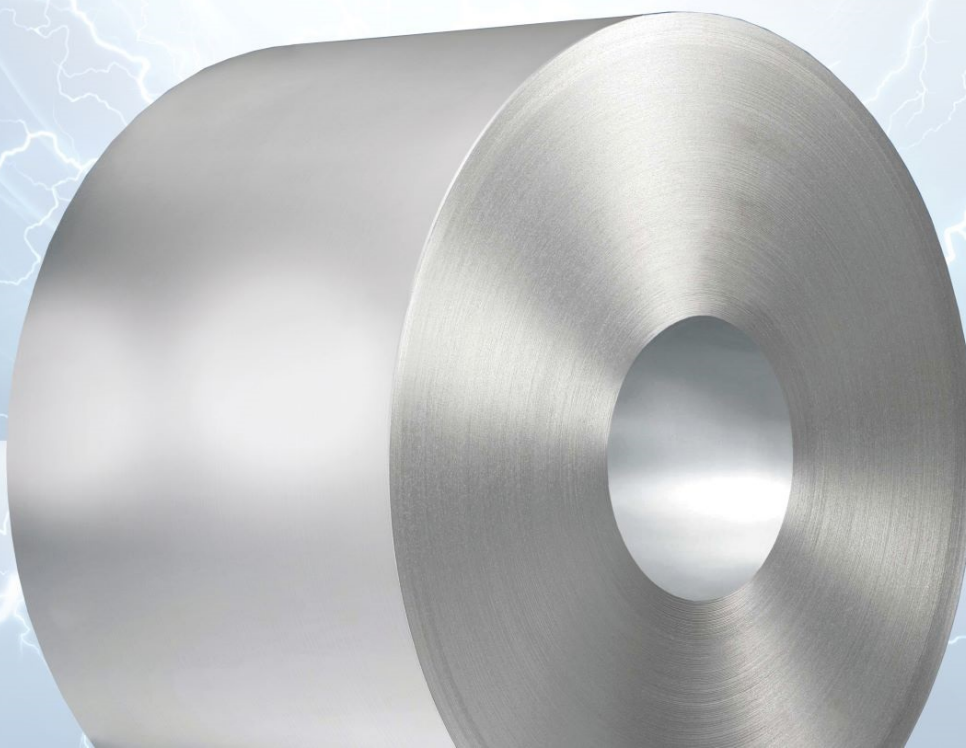

1. General Information

voestalpine Stahl GmbH

Programme holder

IBU – Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

Declaration number

EPD-VOE-20230216-IBC1-EN

This declaration is based on the product category rules:

Structural steels, 01.08.2021
(PCR checked and approved by the SVR)

Issue date

21.08.2023

Valid to

20.08.2028



Dipl.-Ing. Hans Peters
(Chairman of Institut Bauen und Umwelt e.V.)



Florian Pronold
(Managing Director Institut Bauen und Umwelt e.V.)

Electrogalvanized steel strip

Owner of the declaration

voestalpine AG
voestalpine-Straße 3
4020 Linz
Austria

Declared product / declared unit

1 ton of average electrogalvanized steel strip

Scope:


This EPD is based on a declared unit of 1 ton of average electrogalvanized steel strip produced at the production site in Linz.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of EN 15804+A2. In the following, the standard will be simplified as *EN 15804*.

Verification

The standard EN 15804 serves as the core PCR	
Independent verification of the declaration and data according to ISO 14025:2011	
<input type="checkbox"/>	internally
<input checked="" type="checkbox"/>	externally



Dr.-Ing. Andreas Ciroth,
(Independent verifier)

2. Product

2.1 Product description/Product definition

Electrogalvanized steel strip made by voestalpine Stahl GmbH consists of steel strip produced using the blast furnace route with a zinc coating on either one or both sides and any surface treatment requested by the customer (such as oiling). Low-alloy mild steels, press-hardening steels and higher-strength multiphase steels were included in the averages. Applicable national regulations regulate product use at any given site. In Austria, for example, the building regulations of individual provinces and the technical stipulations based on these regulations are applicable.

2.2 Application

The areas of application for electrogalvanized steel strip are found in several industrial sectors that are divided into the following segments:

- Automotive industry
- House industry
- Processing industry

Electrogalvanized steel strip is versatile and finds its application in a number of different industries. Exposed panels, structural components, body components, reflectors for headlights, visible interior room partitions, exposed cable ducts, railings, light reflectors, doors, gates and gate frames, filter cartridges, oil filters, directly coated components such as radiator covers, claddings and structural members. All one-side-galvanized (joined) components that provide benefits to customers, such as auto roofs, tubes and sections. Exposed panels on white goods such as washing machines, refrigerators and switch cabinets.

2.3 Technical Data

The data listed in the declaration of performance are authoritative:

Structural data

Name	Value	Unit
Steel strip thickness	0.4 - 2.0	mm
Surface weight	3.16 - 19.80	kg/m ²

Performance values of the product according to the declaration of performance in relation to essential characteristics in accordance with following standards:

DIN EN 10346:2015, Continuously hot-dip coated steel flat products for cold forming, technical delivery conditions.

DIN EN 10143:2006, Continuously hot-dip coated steel strip and sheet; tolerances on dimensions and form.

VDA Material Data Sheet 239-100, 2016, Flat steel products for cold forming.

2.4 Delivery status

The electrogalvanized steel strip is supplied in coils with a strip width ranging between 900 and 1615 mm. The steel strip thickness ranges between 0.4 and 2 mm, depending on the intended application and customer specifications.

2.5 Base materials/Ancillary materials

The starting product for the electrogalvanized steel strip is a cold-rolled steel strip produced on site at voestalpine Stahl GmbH. The basic material is produced of crude steel comprising roughly 75 % crude iron and 25 % scrap.

Auxiliary materials and additives

- Zinc coating: > 99 % Zn
- Corrosion protection oil: 0.5 – 2 g/m²
- Surface treatments (including passivation agents)

The product contains substances listed in the *ECHA candidate list* of substances of very high concern (SVHC) (14 July 2021) above 0.1% by mass. **No.**

The product contains further CMR substances of category 1A or 1B that not in the candidate list, above 0.1 mass % in at least one sub-product. **No.**

Biocides have been added to the construction product, or the product has been treated with biocides (a treated product pursuant to the Biocidal Product Regulation (EU) No. 528/2012). **No.**

2.6 Manufacture

The starting material for the production of electrogalvanized steel strip is a steel slab produced in the primary route (blast furnace, LD steelmaking plant). The molten crude steel is cast into slabs using a continuous casting method. The cast slabs are reheated in pusher-type or walking beam furnaces and rolled into steel strip in several rolling steps.

The pickled hot strip is further processed in the cold-rolling mill of voestalpine. Prior to the electrogalvanizing process, the material is heat-treated (annealing process) to restore the formability of the steel strip or to produce a material with certain material properties. The surface finish achieved by electrogalvanization provides cathodic corrosion protection for the steel strip.

2.7 Environment and health during manufacturing

The Linz production site of the voestalpine Steel Division is certified pursuant to *EMAS 2009, ISO 9001* and *ISO 14001*. In compliance with EMAS provisions, voestalpine continually publishes environment-related facts and figures pertaining to the production site. Investments are being made continually in the expansion of environmental protection measures at the Linz site in an effort to reduce air and water emissions to a minimum. Compliance with all statutory emission limits is verified. All production systems approved in accordance with applicable environmental impact analyses are inspected on a regular basis as part of environmental audits in accordance with the state of the art.

2.8 Product processing/Installation

Electrogalvanized steel strip made by voestalpine can be further processed using conventional methods such as roll forming, deep drawing, edging etc. Emissions or other harmful effects are not produced during the processing of the declared product.

2.9 Packaging

The declared product is supplied in the form of coils. Packaging consists of paper (coated), steel straps (circumferential and axle hole straps) and wooden frames and varies depending on the type of transport. All packaging can be recycled in its entirety.

2.10 Condition of use

The declared product is a high-quality steel strip that has been electrogalvanized as a corrosion-resistant material. The declaration refers to a product made of steel strip coated with a

zinc coating with an average thickness of roughly 80 g/m².

2.11 Environment and health during use

No adverse effects are expected on human health or the environment during use, nor are any harmful emissions expected from the declared product.

2.12 Reference service life

The referenced useful life depends on the respective application and generally lasts between 15 and 50 years.

2.13 Extraordinary effects

Fire

Not relevant.

Water

No negative effects are to be expected on the environment under the influence of water.

Mechanical destruction

Unforeseeable mechanical effects on the declared product would have no negative environmental impact because of the plasticity of steel.

2.14 Re-use phase

Electrogalvanized steel strip steel can either be reused, introduced to a recycling process or reintroduced to the steelmaking industry as a valuable secondary raw material.

2.15 Disposal

The declared product can be entirely recycled. The waste code is in accordance with European Waste Catalog (EWC): 17 04 05. The type of waste is to be equated with waste catalog code 35103 pursuant to the *Waste Catalog Ordinance* applicable on a national level.

2.16 Further information

Please find more information about the product on our web site at <https://www.voestalpine.com/stahl/en/Products/Steel-strips/Electrogalvanized-steel-strip>

3. LCA: Calculation rules

3.1 Declared Unit

This environmental product declaration refers to a declared unit of 1 ton of electrogalvanized steel strip.

Declared Unit

Name	Value	Unit
Declared unit	1	t
Conversion factor to 1 kg	0.001	

For the calculation of the declared average, all grades produced were included in the form of an annual average. Input and production quantities for the entire calendar year 2019 were taken into account. The calculated results can thus be considered representative for the entire product portfolio electrogalvanized steel strip of voestalpine Stahl GmbH. In the life cycle assessment surface treatment (oiling, phosphating, passivation) was also included. Since surface treatment has a minor influence on the environmental profile of the products, the results are also representative for products without surface treatment.

3.2 System boundary

The life cycle assessment of average electrogalvanized steel strip refers to a cradle-to-gate analysis with modules (A1–A3 + C +D). The following life cycle phases are part of the analysis:

Module A1–A3 | Production stage

The production stage includes the upstream burdens of purchased raw materials (coal, iron ore, pellets etc.), their transports and the manufacturing at the production site in Linz. Material and energy flows for the sinter plant, the coking plant, the blast furnaces, the steelworks, the hot strip mill, pickling, cold rolling, heat treatment as well as electrolytic galvanizing are considered.

Electricity is provided at Linz from a power station where process gases are used as fuel. Since more energy is used than is supplied by this company-owned power station, natural gas and electricity is additionally procured from Austrian networks. Module A1–A3 also includes the production of the product packaging.

Module C1 | Deconstruction and demolition

It is assumed that the product is not connected with other materials and can therefore be dismantled. Associated efforts are negligible, no environmental impacts from the

deconstruction of the products are declared.

Module C2 | Transport to disposal

The transport to the disposal of the material is estimated declaring a 50 km radius to the waste processing.

Module C3 | Waste processing

Product flows that reach Module D for recycling leave the product system in C3. Environmental impacts resulting from the grinding and sorting of steel scrap are not included due to the negligible expected environmental impact.

Module C4 | Landfilling

Module C4 declares the environmental impacts incurred by landfilling (5 % of the product).

Module D | Credits and loads beyond the system boundary

The potential for substituting primary steel with a recycling scenario (95 % of the product) is outlined in Module D.

3.3 Estimates and assumptions

All assumptions are verified through detailed documentation and correspond to the best possible representation of reality based on the available data. Regional applicability of the used background data refers to average data under European or German conditions taken from the *GaBi*-database. German data were used for the Austrian market whenever European or Austrian average data were not available.

3.4 Cut-off criteria

All inputs and outputs for which data are available are included in the LCA model. Data gaps are filled with conservative assumptions from average data (when available) or with generic data and are documented accordingly. Only data with a contribution of less than 1 % were cut off. Ignoring such data is justified due to lack of relevance of the expected effect. Processes, materials, or emissions known to make a significant contribution to the environmental effects of the products under examination have not been neglected. Data were collected from the models and recommendations developed by *worldsteel 2017* and tested using available comparable values. It is assumed that the data have been completely recorded and the overall total of ignored input flows do not amount to more than 5 % of total energy and mass

flows. Environmental impacts of machines, plant and infrastructure were not included.

3.5 Background data

This study uses generic background data for the evaluation of upstream environmental impacts from *GaBi*-database 2021.1 and is modelled in *GaBi*-software version 10.

3.6 Data quality

The foreground data collected at voestalpine Stahl GmbH are based on the quantities used and volumes produced annually. All process data were collected by voestalpine in the course of reporting to official agencies. Data on material and energy use originate from material-specific throughput measurements of various processes as well as from controlling. Data were collected in compliance with *worldsteel 2017* provisions and were subjected to a supplementary plausibility check using material flow analyses of individual process steps. The technological, geographical and timerelated representativeness of the data base was kept in mind when selecting background data. Whenever specific data were missing, either generic datasets or representative average data were used instead. The implemented *GaBi* background datasets are not more than ten years old.

3.7 Period under review

Foreground data were collected in the 2019 production year, and the data are based on the volumes produced on an annual basis.

3.8 Geographic Representativeness

Land or region, in which the declared product system is

manufactured, used or handled at the end of the product's lifespan: Austria

3.9 Allocation

The primary data are allocated using the partitioning approach developed by *worldsteel 2014* for calculating life cycle inventories of coproducts in steel production, which is in line with the provisions of *EN 15804*. The so-called partitioning approach provides for the allocation of environmental effects on the steelmaking process and the emerging byproducts based on physical relations. Material-inherent flow properties are thus taken into account.

The pickling byproducts iron sulphate and iron oxide were cut off as a result of their low contribution to company revenue. Economic allocation is not considered to be expedient because byproducts and coproducts are not tradable goods, directly. Furthermore, longterm contracts for the sale of the byproducts exist, and the negotiated prices are therefore not subject to market dynamics.

3.10 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account.

The *GaBi* background database was used to calculate the LCA (*GaBi 10*; 2021.1).

4. LCA: Scenarios and additional technical information

Characteristic product properties of biogenic carbon

The declared product does not contain any biogenic carbon.

Installation in building (A5)

The end-of-life of the packaging materials is not declared in Module A5.

Name	Value	Unit
Packaging (Paper)	0.0012	kg
Packaging (Steel strips)	0.0002	kg

The end-of-life scenario used in this LCA study is based on the following assumptions and thus complies with the specifications published in *ökobaudat 2023*:

End-of-life (C1-C4)

Name	Value	Unit
Collected separately (Steel)	1000	kg
Recycling 95 %	950	kg
Landfilling 5 %	50	kg

Re-Use, recovery and recycling potential (D), relevant scenario information

Name	Value	Unit
Net flow of steel scrap	812	kg

This scenario contains a recycling rate of 95 %. Since voestalpine externally purchases scrap for steelproduction, this is offset against the steel scrap for recycling (net flow).

5. LCA: Results

The following table contains the LCA results for a declared unit of 1 ton of electrogalvanized steel strip.

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; ND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MNR	MNR	MNR	MND	MND	X	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 t electrogalvanized steel strip

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Global Warming Potential total (GWP-total)	kg CO ₂ eq	2.41E+03	0	3.02E+00	0	2.42E+00	-1.38E+03
Global Warming Potential fossil fuels (GWP-fossil)	kg CO ₂ eq	2.4E+03	0	3E+00	0	2.44E+00	-1.38E+03
Global Warming Potential biogenic (GWP-biogenic)	kg CO ₂ eq	6.89E+00	0	-3.56E-03	0	-2.5E-02	-8.92E-01
Global Warming Potential luluc (GWP-luluc)	kg CO ₂ eq	8.02E-01	0	2.44E-02	0	2.44E-03	1.99E-01
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC11 eq	5.87E-11	0	5.9E-16	0	5.77E-15	-2.29E-12
Acidification potential of land and water (AP)	mol H ⁺ eq	4.99E+00	0	9.92E-03	0	7.78E-03	-2.47E+00
Eutrophication potential aquatic freshwater (EP-freshwater)	kg P eq	3.27E-03	0	8.88E-06	0	1.86E-06	-2.81E-04
Eutrophication potential aquatic marine (EP-marine)	kg N eq	1.05E+00	0	4.55E-03	0	1.93E-03	-3.68E-01
Eutrophication potential terrestrial (EP-terrestrial)	mol N eq	1.13E+01	0	5.08E-02	0	2.12E-02	-3.59E+00
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg NMVOC eq	3.63E+00	0	8.94E-03	0	6.08E-03	-1.89E+00
Abiotic depletion potential for non fossil resources (ADPE)	kg Sb eq	4.6E-02	0	2.65E-07	0	1.68E-07	-2.99E-03
Abiotic depletion potential for fossil resources (ADPF)	MJ	2.23E+04	0	3.98E+01	0	3.56E+01	-1.2E+04
Water use (WDP)	m ³ world eq deprived	9.74E+01	0	2.77E-02	0	-2.89E-02	-2.7E+02

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 t electrogalvanized steel strip

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Renewable primary energy as energy carrier (PERE)	MJ	1.38E+03	0	2.29E+00	0	2.57E+00	1.1E+03
Renewable primary energy resources as material utilization (PERM)	MJ	1.68E+01	0	0	0	0	0
Total use of renewable primary energy resources (PERT)	MJ	1.39E+03	0	2.29E+00	0	2.57E+00	1.1E+03
Non renewable primary energy as energy carrier (PENRE)	MJ	2.24E+04	0	4E+01	0	3.56E+01	-1.2E+04
Non renewable primary energy as material utilization (PENRM)	MJ	0	0	0	0	0	0
Total use of non renewable primary energy resources (PENRT)	MJ	2.24E+04	0	4E+01	0	3.56E+01	-1.2E+04
Use of secondary material (SM)	kg	1.39E+02	0	0	0	0	8.12E+02
Use of renewable secondary fuels (RSF)	MJ	0	0	0	0	0	0
Use of non renewable secondary fuels (NRSF)	MJ	0	0	0	0	0	0
Use of net fresh water (FW)	m ³	7.59E+00	0	2.62E-03	0	3.67E-04	-6.07E+00

RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2: 1 t electrogalvanized steel strip

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed (HWD)	kg	6.65E-06	0	2.11E-09	0	6.3E-09	3.34E-06
Non hazardous waste disposed (NHWD)	kg	2.91E+01	0	6.27E-03	0	5.01E+01	1.44E+02
Radioactive waste disposed (RWD)	kg	1.95E-01	0	7.25E-05	0	4.05E-04	4.34E-04
Components for re-use (CRU)	kg	0	0	0	0	0	0
Materials for recycling (MFR)	kg	0	0	0	9.5E+02	0	0
Materials for energy recovery (MER)	kg	0	0	0	0	0	0
Exported electrical energy (EEE)	MJ	0	0	0	0	0	0
Exported thermal energy (EET)	MJ	0	0	0	0	0	0

RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional: 1 t electrogalvanized steel strip

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Incidence of disease due to PM emissions (PM)	Disease incidence	ND	ND	ND	ND	ND	ND
Human exposure efficiency relative to U235 (IR)	kBq U235 eq	ND	ND	ND	ND	ND	ND
Comparative toxic unit for ecosystems (ETP-fw)	CTUe	ND	ND	ND	ND	ND	ND

Comparative toxic unit for humans (carcinogenic) (HTP-c)	CTUh	ND	ND	ND	ND	ND	ND
Comparative toxic unit for humans (noncarcinogenic) (HTP-nc)	CTUh	ND	ND	ND	ND	ND	ND
Soil quality index (SQP)	SQP	ND	ND	ND	ND	ND	ND

The additional and optional impact categories according to EN 15804+A2 are not declared, as the uncertainty of these indicators is to be classified as high.


Disclaimer 1 – for the indicator 'Potential Human exposure efficiency relative to U235'. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure or radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – for the indicators 'abiotic depletion potential for non-fossil resources', 'abiotic depletion potential for fossil resources', 'water (user) deprivation potential, deprivation-weighted water consumption', 'potential comparative toxic unit for ecosystems', 'potential comparative toxic unit for humans – cancerogenic', 'Potential comparative toxic unit for humans - not cancerogenic', 'potential soil quality index'. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high as there is limited experience with the indicator.

6. LCA: Interpretation

The following interpretation contains a summary of the LCA results referenced to a declared unit of 1 ton electrogalvanized steel strip.

Hot-spot analysis of voestalpine electrogalvanized steel strip

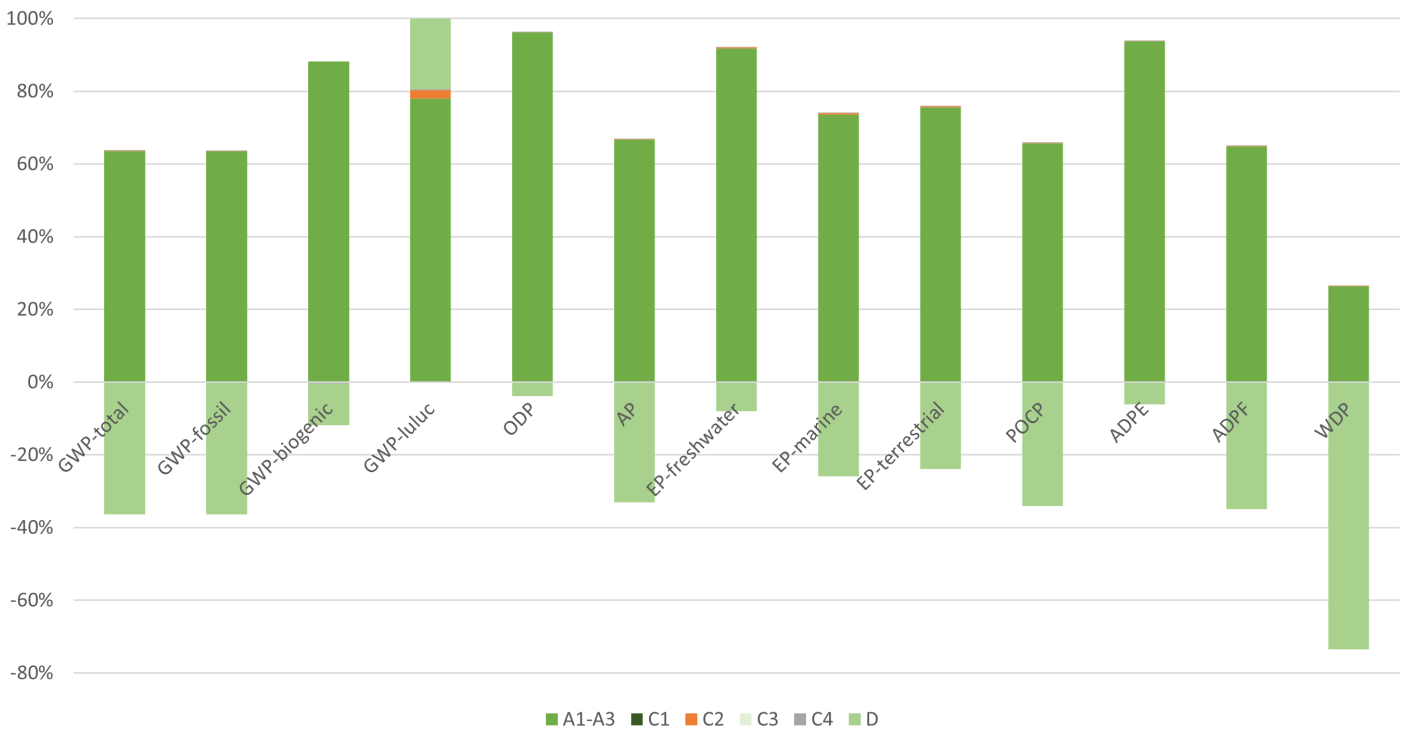

A comparison of the individual lifecycle phases results in a clear dominance of the production phase (Modules A1–A3). The environmental effects in the production phase are mainly dominated by the direct process emissions of steel production and the supply chain of purchased raw materials and energy carriers.

As a result of product recyclability, the material removed at the end of life can substitute primary steel. Module D shows the recycling potential of steel at the end of its product life. This results in credits from the substitution of primary steel.

The environmental impact of the transport of the products to recycling (C2) as well as landfilling of the losses at the end of life (C4) represents a minor contribution to the overall environmental impact of the product.

In summary, raw material input and energy carriers required in

the production phase as well as direct emissions at the site can be identified as important factors in the environmental impact of electrogalvanized steel strips. The greenhouse gases directly emitted from the processes at the Linz production site, especially from the blast furnaces and the energetic treatment of the metallurgical gases in the network, contribute to a large share to potential global warming.

In the environmental profile of the electrolytic galvanizing process, the production of the zinc coating plays a major role.

Electrolytic galvanizing contributes about 3 % to the carbon footprint (GWP), potential acidification (EP) and potential eutrophication of marine and terrestrial ecosystems (EP-marine & EP-terrestrial), with emissions from electricity supply from the power plant and production of the zinc layer as most important drivers.

In terms of potential freshwater eutrophication (EP-freshwater)

and potential contribution to water scarcity (WDP), the share of electrolytic galvanizing is around 20-30 %, and results mainly from the production of the zinc coating. The abiotic depletion potential for nonfossil resources (ADPE) is almost entirely (95 %) depending on the zinc layer.

In the declared average of this EPD, all produced grades were included in the form of a representative average. The analysis of different specifications of electrogalvanized steel strips identifies a variation of the product-related carbon footprint of ± 9 %. For

potential acidification, eutrophication and formation potential of tropospheric ozone photochemical oxidants, this interval is up to ± 30 %. This variance is mainly influenced by the alloying elements used, and their share in the product.

Due to the homogeneous structure of the products, the environmental impact of the products correlates directly with their mass. This implies a slight imprecision for the galvanization as these layers are not scalable linearly but surface-related and are dependent on the variation of their thickness on the respective product.

7. Requisite evidence

Not relevant for this EPD.

8. References

Standards

EN 10143

DIN EN 10143:2006, Continuously hot-dip coated steel strip and sheet; tolerances on dimensions and form.

EN 10346

DIN EN 10346:2015, Continuously hot-dip coated steel flat products for cold forming, technical delivery conditions.

EN 15804

DIN EN 15804:2012+A2:2019+AC:2021, Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products.

ISO 9001

DIN EN ISO 9001:2015, Quality management systems - Requirements.

ISO 14001

DIN EN ISO 14001:2015, Environmental management systems Requirements with guidance for use.

ISO 14025

DIN EN ISO 14025:2011-10, Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044

DIN EN ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines.

VDA Material Data Sheet 239-100: 2016

VDA Material Data Sheet 239-100, 2016, Flat steel products for cold forming.

Further references

Candidate List

Candidate List of Substances of Very High Concern (ECHA Candidate List) of 14 July 2021, published in accordance with Article 59 (10) of the REACH Regulation Helsinki: European Chemicals Agency.

EMAS 2009

Regulation (EC) No 1221/2009 of the European Parliament and of the Council of 25 November 2009 on the voluntary participation by organisations in a community ecomanagement

and audit scheme (EMAS).

GaBi

GaBi 10, Software-System and Database for Life Cycle Engineering. DB 2021.1. Sphera, 1992-2021. Available at: <http://documentation.gabisoftware.com>.

IBU 2021

Institut Bauen und Umwelt e.V.: General Programme Instructions for the preparation of EPDs at the Institut Bauen und Umwelt e.V., Version 2.0 Institut Bauen und Umwelt e.V., 2021, Berlin. www.ibuepd.com.

ökobaudat 2023

ökobaudat 2023. EN 15804 and BNB compliant data for more than 700 building products. Federal Ministry of the Interior, Building and Community.

PCR Part A

Product category rules for building-related products and services. Part A: Calculation rules for the life cycle assessment and requirements on the project report according to EN 15804+A2:2019. Version 1.3, Berlin: Institut Bauen und Umwelt e.V. (Hrsg.), 2022.

PCR: Structural steels

Product category rules for building-related products and services. Part B: Requirements of the EPD for Structural steels. Version 1.1, 2022.

Waste Catalog Ordinance

BMLFUW 2003. Ordinance of the Federal Minister for Agriculture and Forestry, the Environment and Water Resources (Federal Legal Gazette II No. 570/2003) regarding a waste catalog (Waste Catalogue Ordinance).

worldsteel 2014

World Steel Association, 14. Februar 2014: A methodology to determine the LCI of steel industry co products.

worldsteel 2017

World Steel Association, 2017: Life cycle inventory methodology report.



Publisher

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com



Programme holder

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com



Author of the Life Cycle Assessment

Daxner & Merl GmbH
Schleifmühlgasse 13/24
1040 Wien
Austria

+43 676 849477826
office@daxner-merl.com
www.daxner-merl.com



Owner of the Declaration

voestalpine AG
voestalpine-Straße 3
4020 Linz
Austria

+43/50304/15-0
info@voestalpine.com
www.voestalpine.com