



durostat 400/450 toughcore

Wear-resistant steels with especially high toughness and best processing properties



toughcore® makes it possible to shift current limits and match the most stringent material requirements.

durostat 400 toughcore

durostat 400 toughcore offers significant advantages when compared to conventional wear-resistant steels with respect to hardness and toughness. The unique combination of 20% higher hardness and excellent toughness properties of 40 J down to a temperature of minus 40 °C is not achievable when conventional manufacturing technologies are used.

durostat 450 toughcore

The new and patented toughcore® manufacturing technology maintains the same hardness while significantly improving the toughness of durostat 450 to a level not achieved by conventional wear-resistant steel plates. Their exceptional toughness results in a higher level of safety and can be used in applications where conventional materials meet their limits.

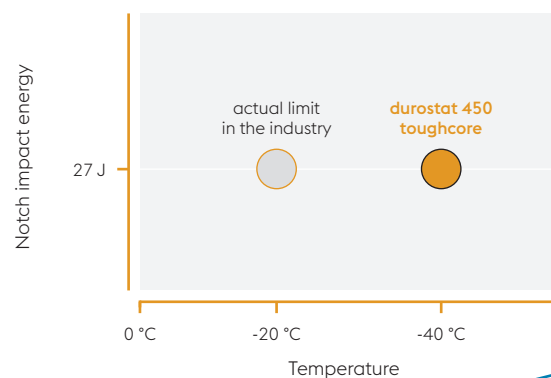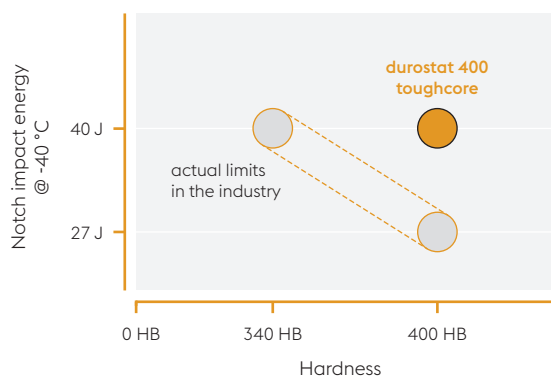

Wear tests of durostat® toughcore

A wear test, based on the ASTM G65 ABRASION TEST as well as Rockwell C tip scratch test and executed by the Austrian Excellence Center for Tribology shows the remarkable benefits of durostat® toughcore wearplates down to a test temperature of -40 °C.

The wear performance was determined by loss of volume and depth of the scratch. It was evaluated, that durostat 400 toughcore showed an approx. 20% better wear performance, than the competitor material.

Convincing advantages of durostat® toughcore

50% higher toughness than conventional material
Guaranteed toughness for low temperature applications
20% higher hardness down to -40 °C than conventional material
Reduced plate thickness and weight as a result of high hardness
Longer service life with much higher resistance to wear
Unique toughcore® manufacturing technology
Best surface quality due to thinner rolling scale
State-of-the-art alloying and low carbon content
Good weldability, no preheating for small plate thicknesses

The information and product properties contained in this printed material are non-binding and serve the sole purpose of technical orientation. They do not replace individual advisory services provided by our sales and customer service teams. The product information and characteristics set forth herein shall not be considered as guaranteed properties unless explicitly stipulated in a separate contractual agreement. For this reason, voestalpine shall not grant any warranty nor be held liable for properties and/or specifications other than those subject to explicit agreement. This also applies to the suitability and applicability of products for certain applications as well as to the further processing of materials into final products. All application risks and suitability risks shall be borne by the customer. The General Terms of Sale for Goods and Services of the voestalpine Steel Division shall apply to all materials supplied by the voestalpine Steel Division and can be accessed using the following link: www.voestalpine.com/stahl/en/The-Steel-Division/General-Terms-of-Sale

Technical changes are reserved. Errors and misprints are excepted. No part of this publication may be reprinted without explicit written permission by voestalpine Stahl GmbH.

Please find further information and downloadable files at www.voestalpine.com/durostat/en



voestalpine Grobblech GmbH
 voestalpine-Straße 3
 4020 Linz, Austria
 T. +43/50304/15-9440
grobblech@voestalpine.com
www.voestalpine.com/grobblech