



# Concrete-free fencing system

Simple - Ecological - Resistant -  
Economical

ROAD / MOTORWAY SITES



INDUSTRIAL SITES



RAILWAY NETWORKS



GREEN SPACES



propiclo® is the reference for concrete-free fencing systems, with 20 000 kms installed in 20 years: halfway round the Earth!

## Simple

Anchor post installation with a simple pneumatic hammer, interlock post into baseplate, attach mesh netting by closing wire support.

## Ecological

No concrete, 100% recyclable, simple dismantling preserves greenfield sites.

## Resistant

Use of very thick S 235 JR construction (5mm steel at the bottom of the connection of post with anchor).

## Economical and fast

**Up to 1 500 metres per day installed** for long linear stretches.

## Universal

Posts adapted to all types of mesh fencing rolls (precise positioning of latches, buckle fasteners available).

## Suitable for all terrains

Can be installed in hard-to-access areas, with no concrete needed.

## Durable

Hot-dip galvanization or thermo-lacquering, with a 10-year guarantee.

## Storage


Standard galvanized products in stock (post of 1.50 m, 2 m and 2.50 m).

## Quality control

Steel graded to NF EN 10025-2 standard.  
Forming to NF EN 10162 standard.  
Hot-dip galvanization to EN ISO 1461 standard.  
CE marking. **CE**

### FENCING RECOMMENDED FOR:

- poultry fence
- railway and high-speed train lines
- roads and motorways
- photovoltaic fields
- reservoir basins
- woods, hunting grounds
- golf courses, stadiums
- vineyards

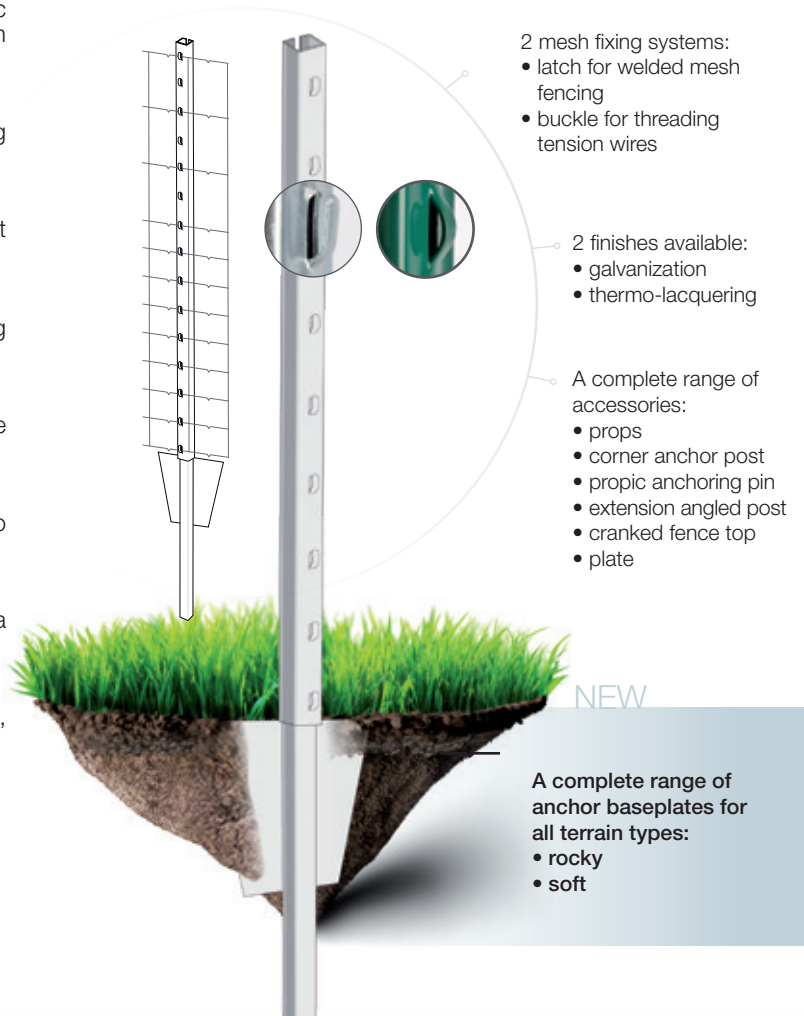

- 2 mesh fixing systems:
- latch for welded mesh fencing
  - buckle for threading tension wires

- 2 finishes available:
- galvanization
  - thermo-lacquering

A complete range of accessories:

- props
- corner anchor post
- propic anchoring pin
- extension angled post
- cranked fence top
- plate

A complete range of anchor baseplates for all terrain types:

- rocky
- soft

## 05 STEPS

### Optimal yield and controlled fixation costs



01 Marking out the fixation line with cord



02 Inserting anchor baseplates with simple pneumatic hammer



03 Interlocking posts in the baseplates



04 Fixing and tensioning the mesh fencing



05 Closing the wire supports

« Our teams will help you to carry out your projects »

### voestalpine Profilafroid

2, rue de Beauvais  
60930 Bailleul-sur-Thérain - France  
Tél : + 33 3 44 07 51 11  
Fax : + 33 3 44 07 65 34  
Email : contact-pfd@voestalpine.com  
www.voestalpine.com/profilafroid