

ČELICI OTPORNI NA TOPLINU

Dostupne varijante proizvoda

Ploče

Opis proizvoda

Ferritic chromium-steel with additions of aluminium, good machineability and high temperature strength as well as scale resistant up to 800°C. Corrosion resistant in hot oxidizing and sulfuric gases and resistant to carburization. Furnace construction and heat treatment shops.

Korištenje


- > Sklopovi za kemijska postrojenja (uklj. LNG, FGD, ureu, LDPE itd.)
- > Drugi sklopovi za naftu i plin te CPI
- > Cijevni proizvodi, priрубnice, priključci


Technički podaci

Oznaka materijala	Standardi
1.4713 SEL	10088-1
X10CrAlSi7 EN	10095 EN ISO

Kemijski sastav

C	Si	Mn	Cr	Al
≤ 0,12	0,50 - 1,00	1	6,00 - 8,00	0,50 - 1,00

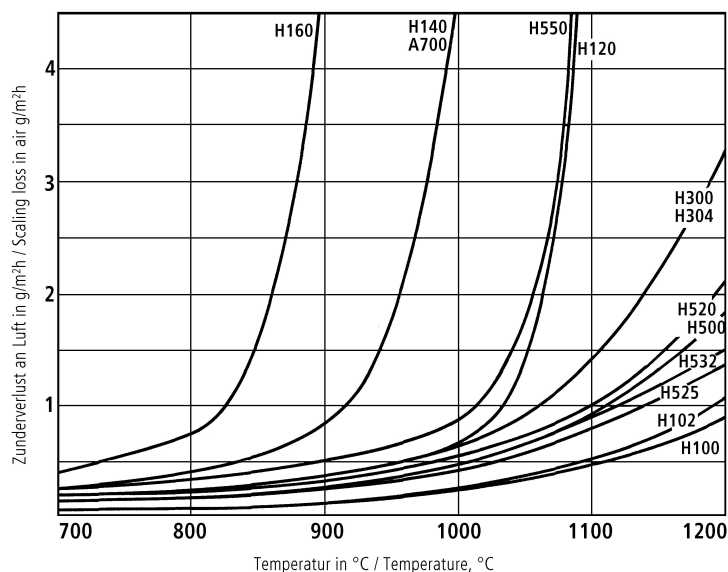

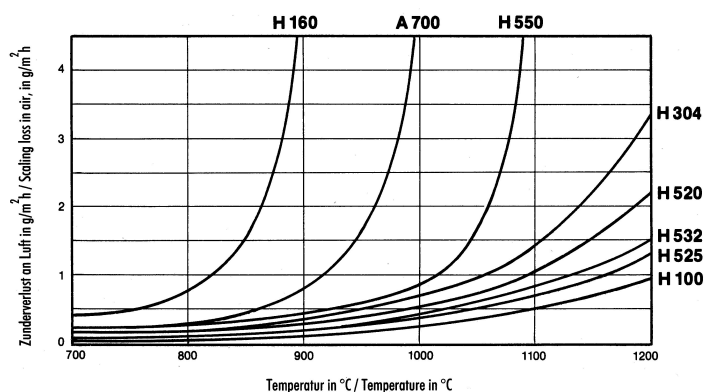

Ako su pored šipkastih proizvoda navedene i druge dostupne varijante proizvoda, imajte na umu da se one mogu razlikovati u pogledu procesa taljenja, tehničkih podataka, stanja isporuke i površinske obrade kao i dostupnih dimenzija proizvoda. Za obvezne tehničke specifikacije, ostale zahtjeve i dimenzije molimo Vas obratite se našim regionalnim voestalpine BÖHLER prodajnim tvrtkama. Informacije u ovom prospektu nisu obvezujuće i ne smatraju se prihvaćenima; umjesto toga, oni su samo za opće informacije. Te su informacije obvezujuće samo ako su izričito postavljene kao uvjet u ugovoru sklopljenom s nama. Mjerni podaci su laboratorijske vrijednosti i mogu se razlikovati od praktičnih analiza. U proizvodnji naših proizvoda ne koriste se tvari štetne za zdravlje ili ozon.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25

8605 Kapfenberg, AT

T. +43/50304/20-0

E. info@bohler-edelstahl.at

<https://www.voestalpine.com/bohler-edelstahl/de/>

voestalpine

ONE STEP AHEAD.