





LEOVA® 50/35 PLUS LEOVA® 50/35 IU-PLUS

The vineyard post for less stringent requirements

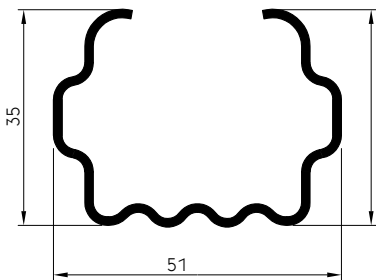

leova® 50/35 IU-PLUS

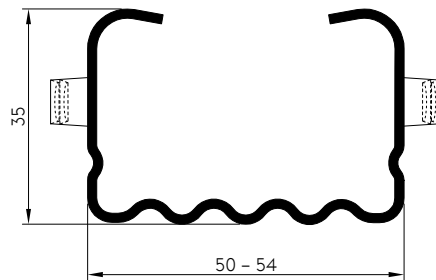

leova® 50/35 PLUS

- » Designed for harvesting machinery
- » No hook shifting
- » Fixed wire anchoring
- » For all common types of wire
- » Easy to position
- » voestalpine quality steel
- » Batch-galvanized
- » Strip-galvanized

Suitable for all soils and foliage heights < 2 m.

The interior combination hooks of the leova® 50/35 IU-PLUS offer customized solutions for use on uneven terrain and in flat vineyards.

The exterior hooks of the leova® 50/35 PLUS make inserting the wire both easy and straightforward.



STRONG AS A LION – SUITED TO YOUR REQUIREMENTS

Batch-galvanized in accordance with the EN ISO 1461 standard

Extremely long service life due to full galvanization with 70 – 80 µm zinc coating.

leova® 50/35 PLUS (1.50 mm)

Length/mm	Type.Nr.	kg/item	Claws
1,800*)	F576973101800	2.85	12
2,000*)	F577073102000	3.17	12
2,100*)	F621273102100	3.32	12
2,250*)	F577173102250	3.56	12
2,400*)	F614973102400	3.80	16
2,500	F577273102500	3.96	16
2,650*)	F577373102650	4.19	16
2,750*)	F577473102750	4.35	16

Strip-galvanized in accordance with the EN 10346 standard

350g of zinc/m²

leova® 50/35 PLUS (1.50 mm)

Length/mm	Type.Nr.	kg/item	Claws
1,800*)	F363013101800	2.58	12
2,000*)	F363013102000	2.86	12
2,250*)	F363013102250	3.22	12
2,400*)	F363013102400	3.44	14
2,500	F363013102500	3.58	14
2,650*)	F363013102650	3.79	16
2,750*)	F363013102750	3.94	16

leova® 50/35 IU-PLUS (1.50 mm)

(interior combination)

1,900*)	F479013101900	2.73	8
2,250*)	F479013102250	3.24	12
2,500*)	F479013102500	3.60	14
2,750*)	F479013102750	3.96	16

leova® 50/35 PLUS and leova® 50/35 IU-PLUS can be set seamlessly with a machine (e.g. by using a hydraulic impression system) or by hand primarily on sandy, clay and mixed soils. Additional stability can be achieved with leova® 50/35 PLUS by attaching anchor plates. The recommended setting depth amounts to about a third of the post length (e.g. 2 m post: 60 cm into the ground).

leova® accessories

Straight anchor plates (only for leova® 50/35 PLUS)

Type.Nr.	kg/item
3824131	0.26

Scratch protective cap (only for leova® 50/35 PLUS)

1802	12
------	----

Anti-hail net 1.2 x 250 m

Type.Nr.	Unit	Requirement/ha
28497	Roll	29 rolls



leova® vineyard posts – Your strong complete system

for all vine training systems, soils and terrains: Posts, end posts, UNI-STOCK vine stakes, anchor, scratch shield, etc.

*) Manufacturing is solely dependent on the order (Period of delivery approx. 6 – 8 weeks)